



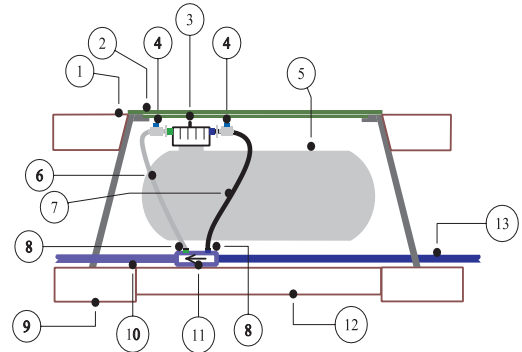

Fertilize Responsibly™

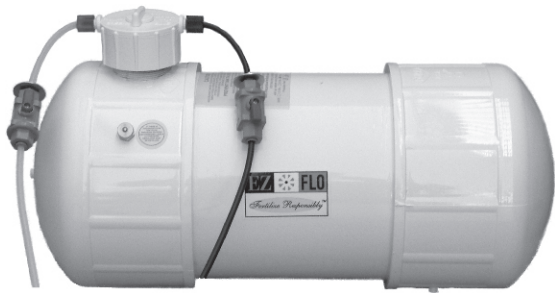

Downloadable CAD drawings and product specifications available at www.ezflorfertilizing.com/1-8.asp

EZ005-FX Features

Tank Capacity - Liquid:	Approx. 4.25 Gal. (16 liters)
Tank Capacity - Water Soluble Fertilizer:	Recommended 25 - 30 lbs. (11.3 - 13.6 kg)
Minimum Flow Requirements:	2.5 gallons/hour (9.5 liters/hr.)
Adjustable Feed Ratio Range:	15,000:1/Slow setting to 400:1/Fast setting
Water Volume to Empty Tank:	63,750 gal (241 kl)/Slow setting 1,700 gal (6.4 kl)/Fast setting
Unit Dimensions (LWH):	22" x 10" x 13" (56cm x 25cm x 33cm)
Valve Box Minimum (LWH):	24" x 13" x 16" (61cm x 33cm x 41cm)
Approx. Weight:	19 lbs. (8.6 kg)

EZ Ball Valve Coupling Recommended for ALL installations. Required for Extremely Low Flow Conditions.

Suggested Landscape Coverage under normal watering conditions*:

100% turf	Up to 18,000 sq ft (1,672 sq m)
75% turf/25% trees/shrubs/flowers	Up to 21,000 sq ft (1,950 sq m)
50% turf/50% trees/shrubs/flowers	Up to 30,000 sq ft (2,787 sq m)

*Assumes a refill frequency of 4-6 weeks and watering every other day. Turf requires more water and therefore increases refill frequency. This unit will service larger areas when filled more frequently.

EZ005-FX (Standard Capacity Model)

Warranty: Five (5) years except under heavy pressure conditions or excessive temperature conditions where summer temperatures exceed 100° F (38° C). Heavy pressure conditions are when static line pressure exceeds 100 PSI (6.9 bars). See other detailed warranty and installation limitations at www.ezflorfertilizing.com/warranty.asp

Includes:

- Bypass fitting, tubing and tubing clamps
- Pressure relief valve - rated 150 PSI (10 bars)
- Two (2) EZ Shutoff valves

This system connects directly to the main line irrigation system after the back flow prevention device and the tank is designed for use under constant pressure. EZ-FLO's patented flow process automatically adjusts to changes in water pressure and water flow without changing fittings. This product is designed to feed both underground sprinkler and drip irrigation zones for commercial, municipal, residential and grower applications. This system is designed for the delivery of products that are designated as non-hazardous.

A code compliant back flow prevention device is required for installation. Installation must follow local and state plumbing codes. Unless otherwise specified, a pressure vacuum breaker is the minimum back flow prevention device required according to University of Southern California - Foundation for Cross Connection Control and Hydraulic Research.