



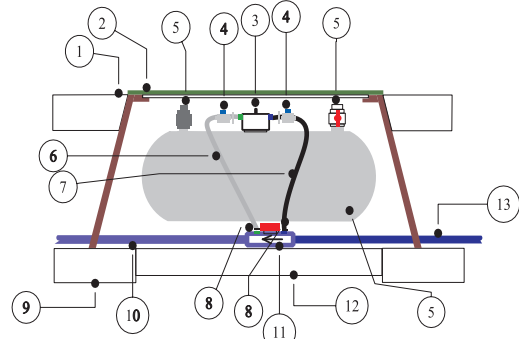

Fertilize Responsibly™

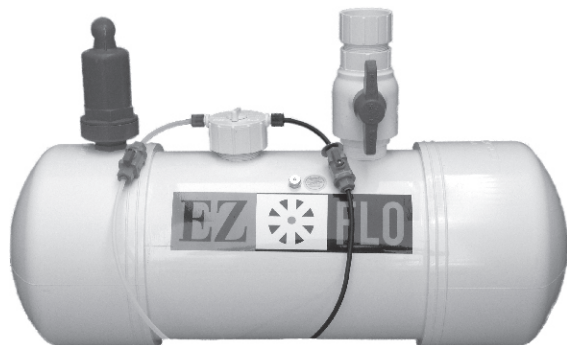

Downloadable CAD drawings and product specifications available at www.ezflofertilizing.com/3-4.asp

EZ010-HC Features

Tank Capacity - Liquid:	Approx. 10.0 Gal. (37.9 liters)
Tank Capacity - Water Soluble Fertilizer*:	Recommended 75-100 lbs. (34 - 45.4 kg)
Minimum Flow Requirements:	2.5 gallons/hour (9.5 liters/hr.)
Adjustable Feed Ratio Range:	15,000:1/Slow setting to 400:1/Fast setting
Water Volume to Empty Tank:	225,000 gal (852 kl)/Slow setting 6,000 gal (22.7 kl)/Fast setting
Dimensions (LWH):	29" x 12" x 18" (74cm x 30cm x 46cm)
Valve Box Minimum (LWH):	38" x 24" x 18" (96cm x 61cm x 46cm)
Approx. Weight:	34 lbs. (15.4 kg)

EZ Ball Valve Coupling Connector Required for ALL installations.

Suggested Landscape Coverage under normal watering conditions:**

100% turf	Up to 120,000 sq ft (11,148 sq m)
75% turf/25% trees/shrubs/flowers	Up to 140,000 sq ft (13,006 sq m)
50% turf/50% trees/shrubs/flowers	Up to 200,000 sq ft (18,581 sq m)

*The amount of water soluble fertilizer that can be loaded into this model is dependent upon the solubility of the fertilizer and following the suggested fill instructions for this unit. The range listed is equal to 65-90% of the maximum tank capacity using a high quality, water soluble fertilizer. Lesser amounts may be used without affecting the proportioning performance of the unit.

**Assumes a refill frequency of 2-3 weeks and watering every other day. Turf requires more water and therefore increases refill frequency. This unit will service larger areas when filled more frequently.

EZ010-HC (High Capacity Model)

Warranty: Five (5) years except under heavy pressure conditions or excessive temperature conditions where summer temperatures exceed 100 F (38 C). Heavy pressure conditions are when static line pressure exceeds 100 PSI (6.9 bars). See other detailed warranty and installation limitations at www.ezflofertilizing.com/warranty.asp

Includes:

- | | |
|---|---|
| Bypass fitting, tubing and tubing clamps | Tank fill valve and lower drain valve (not pictured) |
| Pressure relief valve - rated 150 PSI (10 bars) | Two (2) EZ Shut-off valves (Inflow and outflow shutoff) |
| Air release vent valve | Tank cradle (to maintain level) |

This system connects directly to the main line irrigation system after the back flow prevention device and the tank is designed for use under constant pressure. EZ-FLO's patented flow process automatically adjusts to changes in water pressure and water flow without changing fittings. This product is designed to feed both underground sprinkler and drip irrigation zones for commercial, municipal, residential and grower applications. This system is designed for the delivery of products that are designated as non-hazardous.

A code compliant back flow prevention device is required for installation. Installation must follow local and state plumbing codes. Unless otherwise specified, a pressure vacuum breaker is the minimum back flow prevention device required according to University of Southern California - Foundation